



RK6/RK8/RK10 Outdoor Rental LED Display

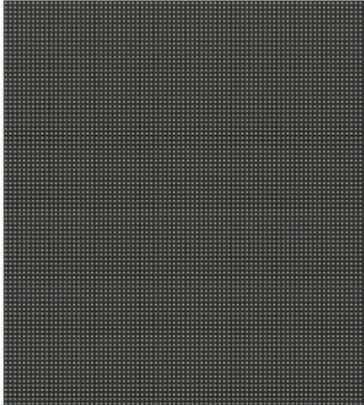

Key Benefits

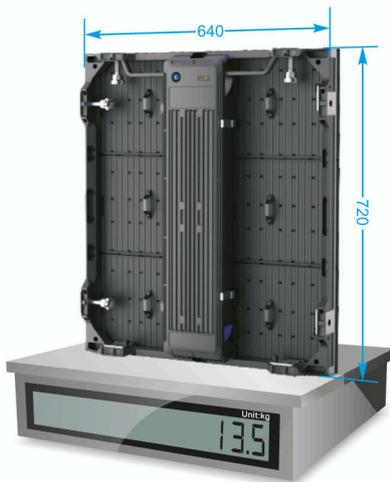

Light weight of only **13.5kg**



Slim panel with a thickness of **100mm**



Fast installation achieved by tool-free thread lock



Integrated handle design convenient for transport



Self-inspection function and working state indicator



Stable power supply and module operation ensured by waterproof hole for heat dissipation



Application



Specifications

| Item | Value | | | Unit |
|--------------------------------------|--------------------------|----------|----------|-----------------------|
| Pixel Pitch | 6.6 | 8 | 10 | mm |
| Pixel Density | 22500 | 15625 | 10000 | pixels/m ² |
| Viewing Angle(H/V) | 140/70 | | | Deg. |
| Brightness | 5500 | 5000 | 5500 | nit |
| Grey Level | 16 | | | bit |
| Refresh Rate | > 1920 | | | Hz |
| Panel Size(W×H) | 640×720 | | | mm |
| Panel Size(W×H) | 25.20×28.35 | | | inch |
| Panel Resolution | 96×108 | 80×90 | 64×72 | pixels |
| Panel Weight | 13.5 | | | kg |
| Max.Hanging Panel Quantity(Vertical) | 15 | | | - |
| Panel Type and Material | Die-casting Aluminum | | | - |
| Module Size(W×H) | 320×240 | | | mm |
| Module Size(W×H) | 12.60×9.45 | | | inch |
| Module Resolution | 48×36 | 40×30 | 32×24 | pixels |
| Protection Grade | IP65/IP43 | | | - |
| Serviceability | Rear | | | - |
| Voltage | AC110/220 | | | V |
| Avg. Power Consumption | 300 | 275 | 300 | W/m ² |
| Max. Power Consumption | 900 | 825 | 900 | W/m ² |
| Drive Mode | 1/6 scan | 1/5 scan | 1/2 scan | - |
| Brightness Adjustment | Manual/Auto/Programmable | | | - |
| Operating Temp/Humidity | -20~+50,10~90 | | | °C/%RH |
| Storage Temp/Humidity | -40~+85,10~95 | | | °C/%RH |
| Lifetime(Normal Temp) | 50000 | | | hours |
| Compliant Standard | CE FCC RoHS | | | - |

*All specifications are correct at time of print, but they are subject to change without further notice.